



Addendum No. 2

To: Pre-Quote Meeting Attendees and Registered Plan holders

From: Shannon McIntyre
City of Mobile Architectural Engineering Department

Re: James M. Seals, Jr. Park – Pickleball and Tennis Court Improvements
Crawford-Murphy Park – Pickleball and Tennis Court Improvements
Project #PR-058-22

Date: May 19, 2022

This Addendum forms a part of, and modifies, the Request for Quotes for the above referenced project, dated May 8, 2022. Acknowledge the receipt of this Addendum No. 2 and all subsequent Addenda, if any, in the space provided on the Quote Form. Failure to do so may subject Quoter to disqualification.

General:

Clarifications:

Item 1. The Pre-Quote Meeting Agenda *with Modifications* and Pre-Quote Meeting Acknowledgment Roster, dated May 11, 2022 are attached and form part of Addendum No. 1. Revisions to the Pre-Quote Agenda are indicated with a strike-through for deletions and *bold italic* typeface for additions.

Drawings: N/A

RFI's:

Item 1. Question: We request the bid date be extended by one (1) week.
Answer: New date for quote to be submitted is June 1, 2022.

Item 2. Question: We request 120 days to complete the project.
Answer: Construction time shall be 120 days in lieu of 60 days.

- Item 3. Question: We request the asphalt be 1” minimum and 1 ½” maximum.
Answer: This is approved.
- Item 4. Question: Please confirm the colors will be Standard Blue and Medium Green.
Answer: Confirmed
- Item 5. Question: We would like to submit the Acrytech Surfacing System as an approved equal for the surfacing material, (section 2.1). We also need to know if we will be required to protect the drain inlets at the parks.
Answer: Submitted materials are approved (attached). Drain inlets do not need barriers to protect but in no situation should paint be poured on ground or equipment be cleaned on site unless it is collected and removed. Asphalt shall not be left on grass or allowed to enter the drain inlets.

END OF ADDENDUM NO. 2

ACRYTECH

ACRYLIC RESURFACER TDS

1.0 General Description

ACRYTECH Acrylic Resurfacer is a 100% Acrylic Latex Emulsion Concentrate. Acrylic Resurfacer is intended for new and existing asphalt or concrete based tennis courts, basketball courts, running tracks, volleyball courts, and other recreational surfaces. Acrylic Resurfacer is highly resistant to wear and ultra-violet degradation and does not contain any asbestos, lead or mercury. Colors: Black, Neutral.

2.0 Safety Guidelines

Avoid contact with eyes, skin and clothing. Refer to Safety Data Sheet for additional information. Wear proper NIOSH approved respirator when handling silica sand.

3.0 Storage and Handling

Protect from freezing. Store between 4°C (40°F) and 32°C (90°F).

Packaging: 55 gallon drum (560 lbs.), 30 gallon drum (300 lbs.), 5 gallon pail (53 lbs.). Drums are heavy, use caution when moving.

4.0 Coverage

Varies by surface condition and porosity.

4.1 Uncoated new surface

- a. 1st coat: .07-.09 gallons of concentrate per square yard.
- b. Other coats: .04-.05 gallons of concentrate per square yard.

4.2 Previously coated surface: .04-.05 gallons of concentrate per square yard per coat.

5.0 Preparation Guidelines

5.1 New Construction (asphalt)

- a. Allow asphalt to cure a minimum of 14 days.
- b. Flood surface with water to check for depressions 1/16" or greater. Fill with ACRYTECH Sport Patch (Deep Patch) as needed and allow to cure.

5.2 New Construction (concrete)

- a. For proper bonding concrete should have a broom finish and a vapor barrier installed.
- b. Allow concrete to cure a minimum of 30 days
- c. Acid bath concrete using muriatic acid. Follow manufacturers' recommendations
- d. Flood surface with water to check for depressions 1/16" or greater. Fill with ACRYTECH Sport

A product of Stegas, Inc.

www.Tennispaint.com

2988 Angellet Dr. Austell, GA 30106



- Patch (Deep Patch) as needed.
- e. Seal concrete with ACRYTECH Concrete Sealer.

5.3 Existing Construction (asphalt or concrete)

- a. Pressure wash surface to remove dirt, mildew and other contaminants.
- b. Fill cracks with ACRYTECH Sport Patch (Deep Patch) or other crack repair method.

6.0 Mixing Instructions

27.5 gal Acrylic Resurfacer concentrate

Filling Power	Greater Filling (e.g. New asphalt)	Standard Filling
Sand Grade	80 mesh	80 mesh
Sand Qty	250 pounds	200 pounds
Water	15-18 gallons	15-18 gal

7.0 Application

7.1 Apply with soft rubber squeegee.

- a. Apply one coat of Acrylic Resurfacer.
- b. If a second coat is required, apply perpendicular to the first.

8.0 Limitations

DO NOT APPLY WHEN:

1. Rain is in the near forecast.
2. Surface temperatures exceed 54°C (130°F). Surface temperatures may be reduced by misting surface with water prior to application.
3. Do not apply when ambient air temperatures are below 10°C (50°F).

9.0 Physical Properties

Warranty	2 years
Colors	2
Weight per gallon	9.5 lbs
Application and curing Temp	50-130°F
Average dry time	2 - 4 hours
Cure time before use (min)	72 hrs

ACRYTECH

COLORGUARD TDS

1.0 General Description

ACRYTECH Colorguard (Made in America since 1995) is a 100% Acrylic Latex Emulsion Concentrate Surfacing System designed to be a playing surface for asphalt or concrete based tennis courts, basketball courts, running tracks, volleyball courts, and other recreational surfaces. ACRYTECH Colorguard is highly resistant to wear and ultra-violet degradation and does not contain any asbestos, lead or mercury.

ACRYTECH Colorguard is available in two forms, a concentrate, where sand is added on site and pre-mixed (sand factory added at the rate to achieve a Medium court pace). The speed of play is directly related to the size of sand and sand content. Less sand results in a faster speed of play. Larger sand results in a slower speed of play. See 7.0 for speed of play adjustments.

ACRYTECH Colorguard colors: Competition Blue, Competition Green, Beige, Blue, Forest Green, Gray, Light Blue, Medium Green, Maroon, Purple, Red and Terra Cotta. Custom colors are available upon request.

2.0 Safety Guidelines

Avoid contact with eyes, skin and clothing. Refer to Safety Data Sheet for additional information. Wear proper NIOSH approved respirator when handling silica sand.

3.0 Storage and Handling

Protect from freezing. Store between 4°C (40°F) and 32°C (90°F).

Packaging: 55 gallon drum (560 lbs.), 30 gallon drum (300 lbs.), 5 gallon pail (53 lbs.). Drums are heavy. Use caution when moving.

4.0 Coverage

Coverage varies upon surface condition and porosity.

Texture coat: .04-.05 gal of concentrate per square yard.

Finish coat (top layer on inline skating surface): .03-.04 gal of concentrate per square yard.

5.0 Preparation Guidelines

5.1 New Construction (asphalt)

- a. Allow asphalt to cure a minimum of 14 days.

A product of Stegas, Inc.

www.Tennispaint.com

2988 Angellet Dr. Austell, GA 30106



b. Flood surface with water to check for depressions 1/16" or greater. Fill with ACRYTECH Sport Patch (Deep Patch) as needed and allow to cure.

5.2 New Construction (concrete)

- a. For proper bonding concrete should have a broom finish and a vapor barrier installed.
- b. Allow concrete to cure a minimum of 30 days.
- c. Acid bath concrete using muriatic acid. Follow manufacturers' recommendations.
- d. Flood surface with water to check for depressions 1/16" or greater. Fill with ACRYTECH Sport Patch (Deep Patch) as needed.
- e. Seal concrete with ACRYTECH Concrete Binder.

5.3 Existing Construction (asphalt or concrete)

- a. Pressure wash surface to remove dirt, mildew and other contaminants.
- b. Fill cracks with ACRYTECH Sport Patch (Deep Patch) or other crack repair method.

6.0 Mixing Instructions

1. ACRYTECH Acrylic Resurfacer Chart
27.5 gal concentrate - 1 or 2 coats

Filling Power	Greater Filling (e.g. New asphalt)	Standard Filling
Sand Grade	80 mesh	80 mesh
Sand Qty	250 pounds	200 pounds
Water	15-18 gallons	15-18 gal

2. ACRYTECH Colorguard Court Speed of Play chart
27.5 gal concentrate - 2 or 3 coats

Speed of Play	Medium-Slow	ITF Medium (standard)	Medium-Fast
Sand Grade	80 mesh	80 mesh	80 mesh
Sand Qty	225 pounds	200 pounds	150 pounds
Water	15-18 gallons	15-18 gallons	15-18 allons



7.0 Application

- 7.1 All Surfaces-apply with soft rubber squeegee. Allow 1 to 3 hours for drying time between coats.
 - a. Apply one to two coats of Acrylic Resurfacer (rougher surfaces may require two coats).
 - b. Apply at least two coats of Colorguard.

8.0 Limitations

DO NOT APPLY WHEN:

- 1. Rain is in the near forecast.
- 2. Surface temperatures exceed 54°C (130°F). Surface temperatures may be reduced by misting surface with water prior to application except on the final coat.
- 3. Ambient air temperatures are below 10°C (50°F).

9.0 Physical Properties

Warranty	2 years
Colors	12 standard
Weight per gallon	9.8 lbs
Application and curing temp	50-130°F
Average dry time	2 - 4 hours
Cure time before use (min)	72 hrs

ACRYTECH

WHITE LINE PAINT TDS

1.0 General Description

ACRYTECH White Line Paint is a 100% Acrylic Latex Emulsion textured line marking paint. It is uniquely formulated to leave crisp, clean lines in one coat. For competition courts and even crisper lines, prime with ACRYTECH Line Primer. ACRYTECH White Line Paint is designed for use on asphalt or concrete based tennis courts, basketball courts, running tracks, volleyball courts, and other recreational surfaces. It is highly resistant to wear and ultra-violet degradation and does not contain any asbestos, lead or mercury.

2.0 Safety Guidelines

Avoid contact with eyes, skin and clothing. Refer to Safety Data Sheet for additional information.

3.0 Storage and Handling

Protect from freezing. White Line Paint should be stored between 4°C (40°F) and 32°C (90°F).
Packaging: 1 gallon squeeze bottles (11 lbs).

4.0 Coverage

1 gallon covers one tennis court (480 linear feet at 2" wide).

5.0 Application

Apply only after ACRYTECH Colorguard is thoroughly dry, up to 24 hours after final coat. Apply 1 (2nd optional) coat with soft bristle brush or high quality roller. Apply up to 20 feet at a time if ambient air temperature exceeds 30°C (86°F). Apply up to 40 feet at a time if ambient air temperature is under 30°C (86°F).

6.0 Limitations

DO NOT APPLY WHEN:

1. Rain is in the near forecast.
2. Surface temperatures exceed 54°C (130°F).
3. Ambient air temperatures are below 10°C (50°F).

A product of Stegas, Inc.

www.Tennispaint.com

2988 Angelletta Dr. Austell, GA 30106






Player's Choice Colors



Self-Crosslinking
TECHNOLOGY

Player's Choice Colors are uniquely formulated for their rich color, player eye comfort and exceptional contrast.

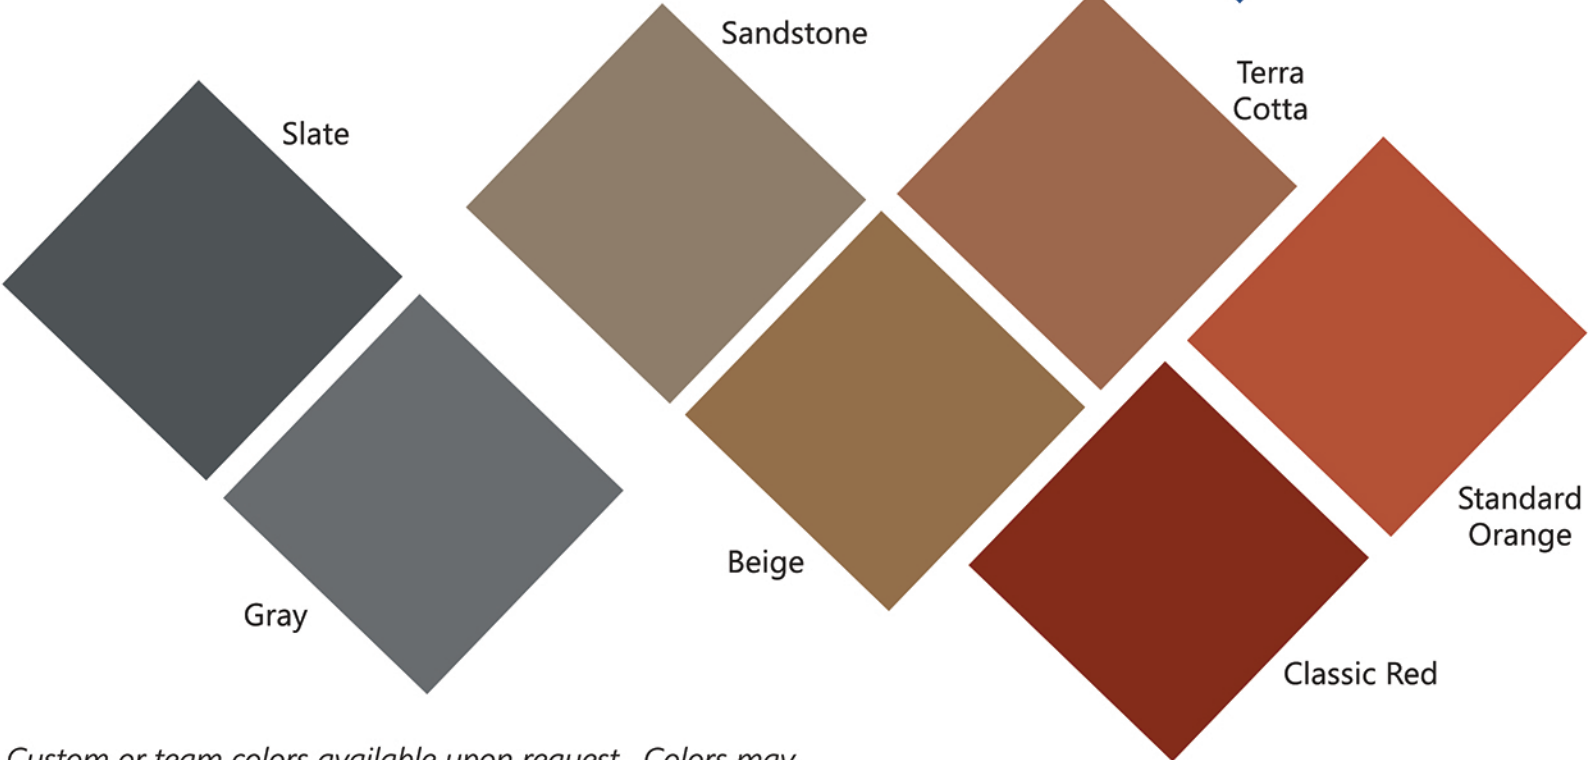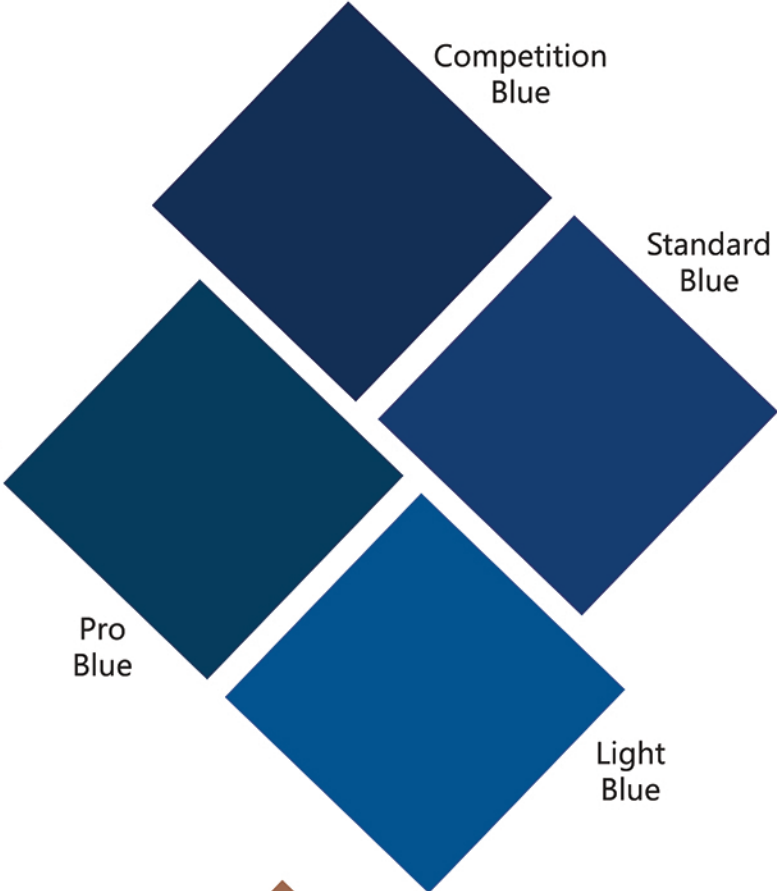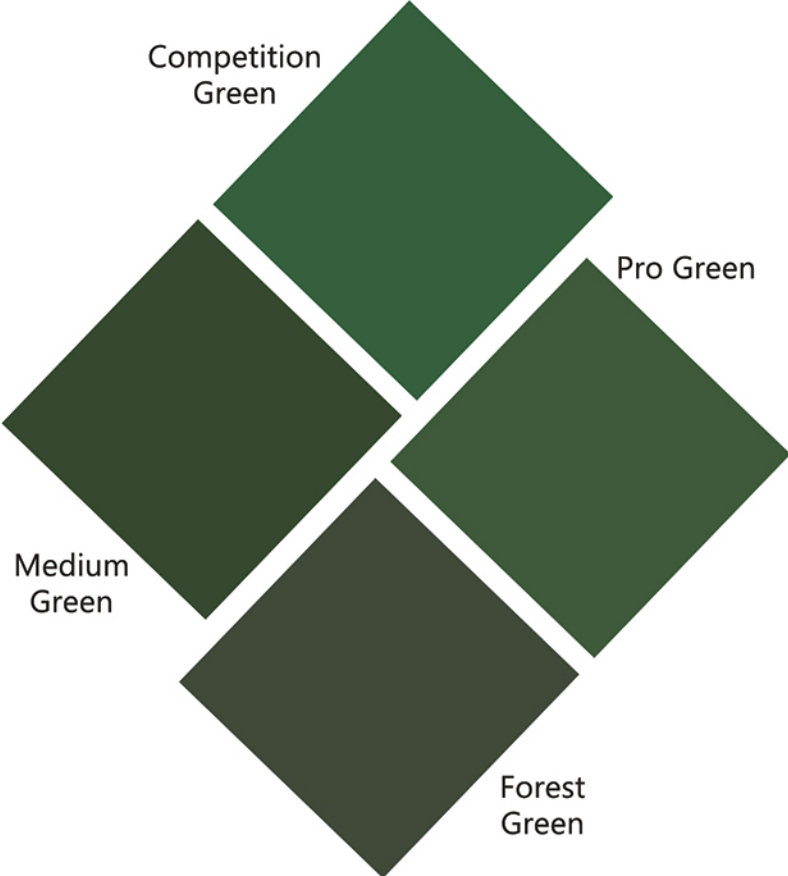

Custom or team colors available upon request. Colors may vary on your monitor/computer. See website for visualizer. Select pigments may increase price.

James M. Seals, Jr. Park – Pickleball and Tennis Courts Improvements
Crawford-Murphy Parks – Pickleball and Tennis Courts Improvements
 540 Texas Street, Mobile, Alabama 36603
 351 South Ann Street, Mobile, Alabama 36604
PR-058-22

QUOTE FORM:

Company Name: _____

Company Address: _____

Office Phone #: _____ **Fax #:** _____

City of Mobile Business License No.: _____

In compliance with the Request for Quotes prepared by the City of Mobile, Architectural Engineering Department, dated _____, and all Addendum(a) No(s) _____ dated _____, the undersigned does hereby propose to furnish all labor, materials, tools, equipment and supplies and to sustain all expenses incurred in performing the Scope of Work for the amount listed below. The Contractor shall deliver the work complete within one hundred twenty (120) calendar days from the written Notice to Proceed.

Quoters shall NOT include sales tax in their quote. Submit Form C-3A, Accounting of Sales Tax, with Quote.

Quotes shall be provided in whole dollar amount with no cents.

James M. Seals, Jr. Park Base Quote Amount: _____

Amount in Words
 _____ Dollars & No Cents \$ _____ .00

Contingency Allowance: One Thousand Five Hundred Dollars & No Cents \$1,500.00
 Amount in Words Amount in #'s

Total Base Quote Amount: _____

Amount in Words
 _____ Dollars & No Cents \$ _____ .00
 Amount in #'s

Crawford-Murphy Park Base Quote Amount: _____

Amount in Words
 _____ Dollars & No Cents \$ _____ .00

Contingency Allowance: One Thousand Five Hundred Dollars & No Cents \$1,500.00
 Amount in Words Amount in #'s

Total Base Quote Amount: _____

Amount in Words
 _____ Dollars & No Cents \$ _____ .00

Total Quote Amount: _____
Amount in Words (Seals Base Quote + Crawford Base Quote)
_____ Dollars & No Cents \$ _____ .00
Amount in #'s

Contact Phone #: _____ **Cell #:** _____

E-mail Address: _____

Signature: _____ **Date:** _____

Printed Name: _____ **Title:** _____