



CROSS SECTION
NTS

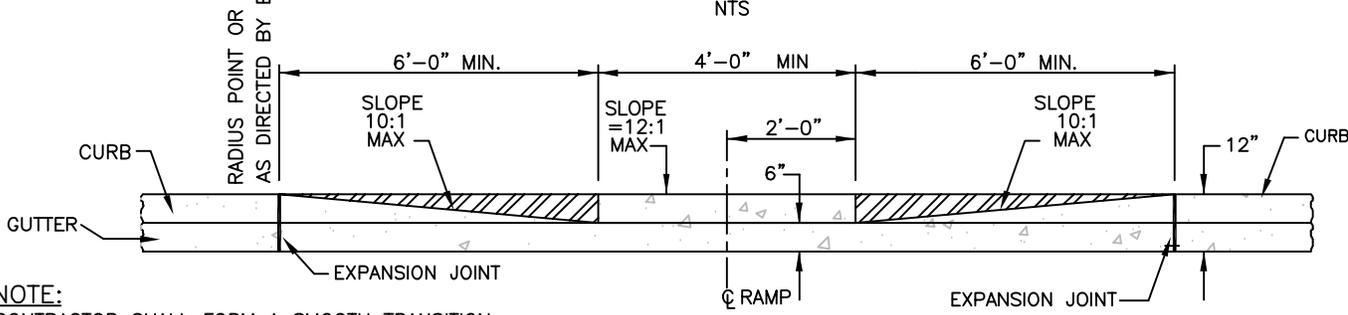


CURB LEVEL VIEW
NTS

NOTE:
CONTRACTOR SHALL FORM A SMOOTH TRANSITION FROM 6" HIGH CURB TO EDGE OF RAMP

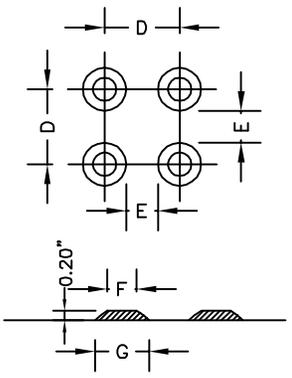

| | MIN. | MAX. |
|---|-------|-------|
| D | 1.60" | 2.35" |
| E | .65" | 1.50" |
| F | .45" | .80" |
| G | .90" | 1.40" |

TRUNCATED DOME
SURFACE DETAIL

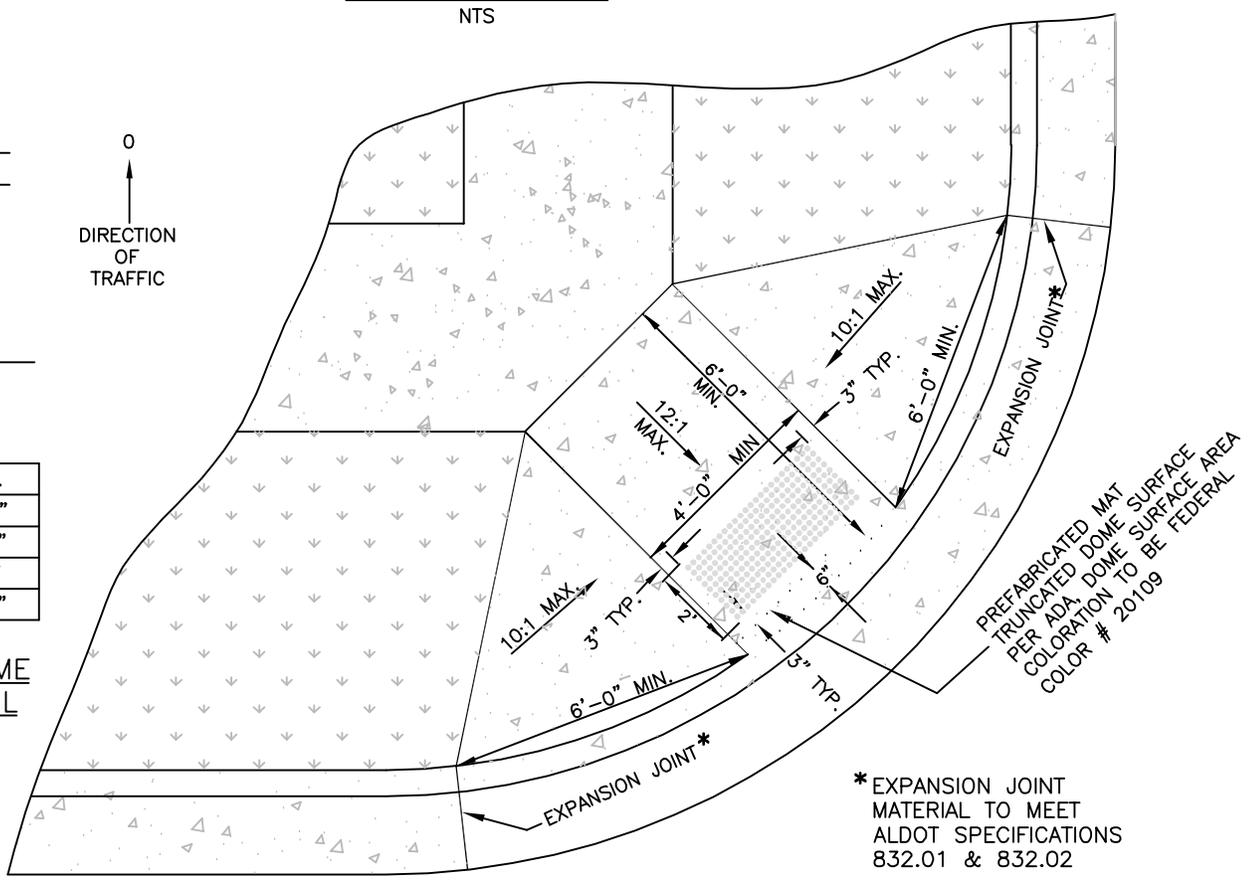

PLAN VIEW
NTS



**CITY OF MOBILE, ALABAMA
ENGINEERING DEPARTMENT**
**TYPICAL HANDICAP CURB RAMP
OBLIQUE RAMP AT INTERSECTION
W/ GRASSED AREA**